


ECODISC 316 Diffusers



Specifications

Size:	<i>Dia 316 mm</i>
Membrane:	<i>MOC : EPDM compound</i>
	<i>Slit size: normally 0.8 to 1 mm</i>
Base:	<i>Polypropylene</i>
Clamp:	<i>SS 304</i>
Connection:	<i>1" BSP inlet</i>
Recommended Air flow:	<i>Standard recommendation: upto 6 cum/hr</i>
	<i>Maximum : upto 8.5 cum/hr</i>
Recommended Pressure:	<i>upto 1.0 kg/cm²</i>
SOTE:	<i>< 3 mtr SWD : 5.5% per mtr submergence</i>
	<i>> 3 mtr : upto 6.5% per mtr submergence</i>

Features

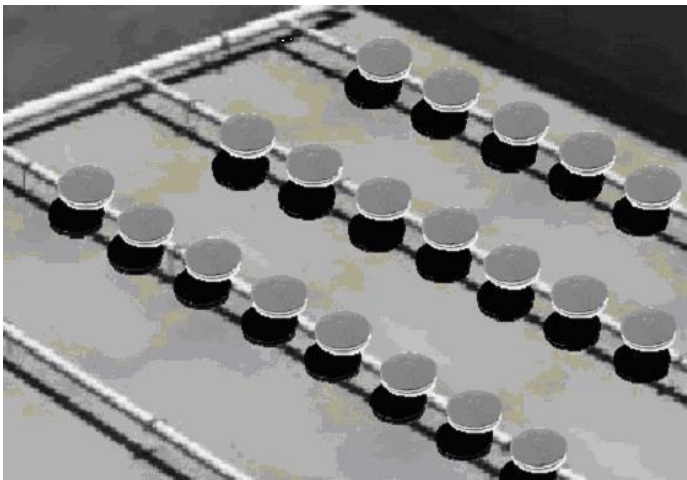

- Highest oxygen transfer efficiency
- EPDM / Silicone blends ensure that membranes are more flexible and inflatable.
- Resistance to many chemicals
- The unique "I" slit design prevents back flow. When the blower is put off, the membrane dis-inflates and regains its smooth surface and does not allow ingress of particles.



ECOSAFE SOLUTIONS

F-122, Seetaram Complex, Subhanpura, Vadodara 390023, India

Call: +91-98242-12275 Fax: +91-265-2280902 e-mail: vp@ecosafeindia.com